



AX12B004-280/350/385 AX24B004-280/350/385

BRUSHED DC AXIAL FAN SERIES

STRAIGHT BLADE DESIGN

12V, 24V

765~1754 CFM (1300~2980 m³/h)

Dual Ball Bearings

Housing: PA66 + 30% GF, UL94-V0

Impeller: PA66 + 30% GF, UL94-V0


Operating Temperature: -40°C ~ +70°C

Operating Life: 6,000 hours

IP55 Dust & Moisture Protection

RoHS

Model Number	Airflow Direction	Voltage (V)	Part Number	Current (A)	No. Speeds	Airflow (Q) (CFM) (m ³ /h)		CROSS REFERENCE PART NUMBER
AX12B004-B280-1SP-02	Blowing	12	01.12.52B	≤ 10.5	1	765	1300	SPAL VA09-AP12 / C-27S VA09-AP12 / C-54S VA09-AP50 / C-27S
AX12B004-B350-1SP-02	Blowing	12	01.12.82B	≤ 7	1	1313	2230	SPAL VA08-AP70 / LL-23S VA08-AP71 / LL-53S
AX12B004-B385-1SP-02	Blowing	12	01.12.92B	≤ 13	1	1754	2980	SPAL VA18-AP70 / LL-41S VA18-AP70 / LL-86S VA18-AP71 / LL-42S
AX12B004-S280-1SP-02	Suction	12	01.12.44B	≤ 10.5	1	765	1300	SPAL VA09-AP12 / C-27A VA09-AP12 / C-54A
AX12B004-S350-1SP-02	Suction	12	01.12.81B	≤ 17	1	1401	2380	SPAL VA08-AP70 / LL-23A VA08-AP70 / LL-23MA
AX12B004-S385-1SP-02	Suction	12	01.12.91B	≤ 16	1	1754	2980	SPAL VA18-AP70 / LL-41 VA18-AP70 / LL-86A
AX24B004-B280-1SP-02	Blowing	24	01.24.52B	≤ 5	1	795	1350	SPAL VA09-BP12 / C-27S VA09-BP12 / C-54S VA09-BP50 / C-27S
AX24B004-B350-1SP-02	Blowing	24	01.24.82B	≤ 8.5	1	1383	2350	SPAL VA08-BP70 / LL-23S VA08-BP70 / LL-23MS
AX24B004-B385-1SP-02	Blowing	24	01.24.92B	≤ 9	1	1736	2950	SPAL VA18-BP70 / LL-41S VA18-BP70 / LL-86S
AX24B004-S280-1SP-02	Suction	24	01.24.44B	≤ 5	1	795	1350	SPAL VA09-BP12 / C-27A VA09-BP12 / C-54A
AX24B004-S350-1SP-02	Suction	24	01.24.81B	≤ 8.5	1	1471	2500	SPAL VA08-BP70 / LL-23A VA08-BP70 / LL-23MA
AX24B004-S385-1SP-02	Suction	24	01.24.91B	≤ 9	1	1736	2950	SPAL VA18-BP70 / LL-41A VA18-BP70 / LL-86A

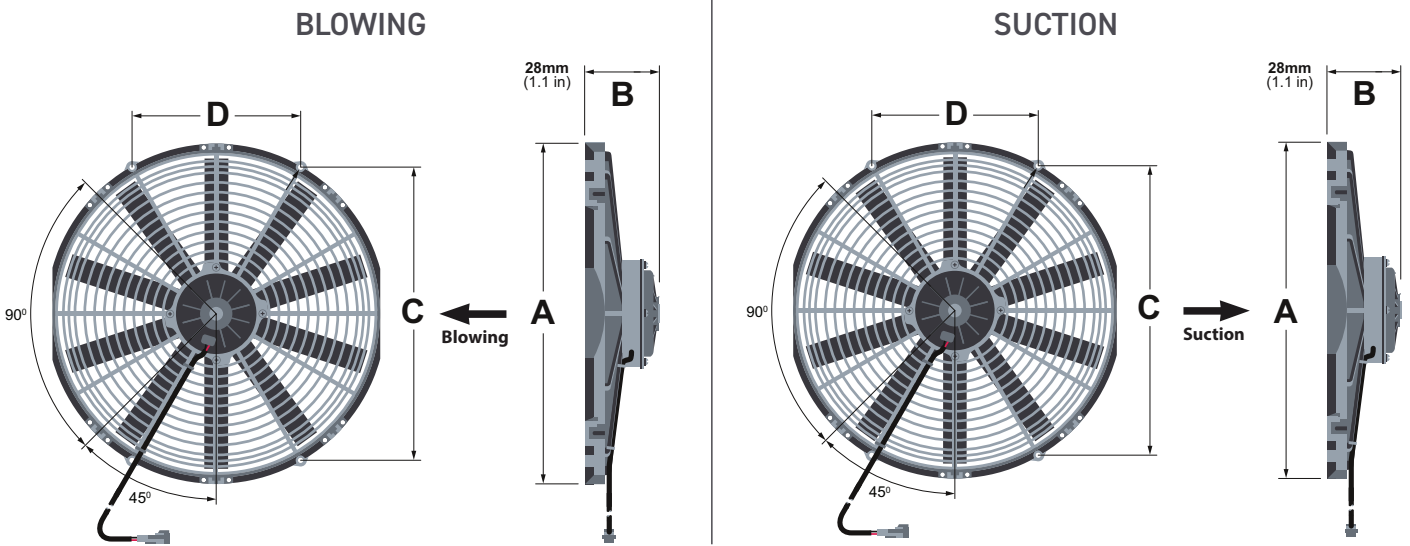

Model Number	Part Number	DIMENSIONS mm (in)			
		A	B	C	D
AX12B004-B280-1SP-02	01.12.52B	309.5 (12.19)	68 (2.68)	267.6 (10.54)	154.5 (6.08)
AX12B004-B350-1SP-02	01.12.82B	384 (15.12)	88 (3.46)	332.5 (13.09)	191.5 (7.54)
AX12B004-B385-1SP-02	01.12.92B	414 (16.30)	90 (3.54)	358 (11.77)	206.5 (8.13)
AX12B004-S280-1SP-02	01.12.44B	309.5 (12.19)	68 (2.68)	267.6 (10.54)	154.5 (6.08)
AX12B004-S350-1SP-02	01.12.81B	384 (15.12)	88 (3.46)	332.5 (13.09)	191.5 (7.54)
AX12B004-S385-1SP-02	01.12.91B	414 (16.30)	90 (3.54)	358 (14.09)	206.5 (8.13)
AX24B004-B280-1SP-02	01.24.52B	309.5 (12.19)	68 (2.68)	267.6 (10.54)	154.5 (6.08)
AX24B004-B350-1SP-02	01.24.82B	384 (15.12)	88 (3.46)	332.5 (13.09)	191.5 (7.54)
AX24B004-B385-1SP-02	01.24.92B	414 (16.30)	90 (3.54)	358 (14.09)	206.5 (8.13)
AX24B004-S280-1SP-02	01.24.44B	309.5 (12.19)	68 (2.68)	267.6 (10.54)	154.5 (6.08)
AX24B004-S350-1SP-02	01.24.81B	384 (15.12)	88 (3.46)	332.5 (13.09)	191.5 (7.54)
AX24B004-S385-1SP-02	01.24.91B	414 (16.30)	90 (3.54)	358 (14.09)	206.5 (8.13)