


PT0610-111-P3/PT0612-111-P3 PT0614-111-P3

CORELESS DC VIBRATION MICRO MOTOR

6D x 10mmL (0.24D x 0.39inL)

6D x 12mmL (0.24D x 0.47inL)

6D x 14mmL (0.24D x 0.55inL)

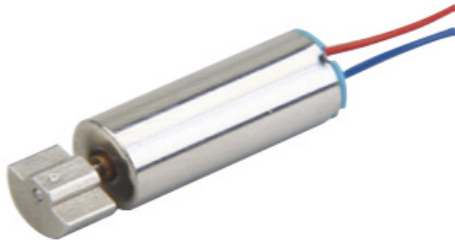

VOLTAGE	2.0~3.5V
HOUSING LENGTH	10.3~14.0mm (0.41~0.55in)
DIAMETER	6mm (0.24in)
TOTAL LENGTH	14.5~20.3mm (0.57~0.80in)
VIBRATION SPEED	10000~11000 RPM
CURRENT	40~70mA
OPERATING TEMPERATURE	-20°C ~+60°C

MODEL NUMBER	RATED VOLTAGE	OPERATING VOLTAGE	STARTING VOLTAGE	COUNTER WEIGHT	RATED SPEED	RATED CURRENT	STALL CURRENT	ARMATURE RESISTANCE
	V	V	V	mm	RPM	mA	mA	Ω
PT0610-111-P3	3.0	2.0~3.5	1.1Max	R2.8*3.0	11000 ± 2000	70	110	25.8
PT0612-111-P3	3.0	2.0~3.5	1.0Max	R2.8*3.0	10000 ± 2000	40	85	36.5
PT0614-111-P3	3.0	2.0~3.5	1.0Max	R2.8*3.0	10000 ± 2000	50	95	11.6

UNIT: mm

